
# САРТОР<sup>®</sup> **ЕР 620**

### **Round Inserts - Ribbed**

Ideal tubing closures as furniture glides Protects floor surfaces when used as feet Ribbed for easy assembly and secure fitting





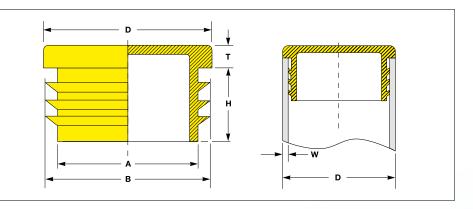



Material : LD-PE, low density polyethylene

Standard Colour : black

Ideal tubing closures as furniture glides. Protects floor surfaces when used as feet.

Ribbed for easy assembly and secure fitting.





						All dimensions in mm
Outside Dimension of Tube	Wall Thickness	A	В	н	т	Reference-No.
D	W					
10.0	1.0 - 2.0	2.8	9.2	10.1	3.5	GL 10 × 1.0 - 2.0
12.0	1.0 - 2.0	4.7	10.9	11.5	3.3	GL 12 × 1.0 - 2.0
13.0	1.0 - 2.0	5.6	12.2	11.5	3.7	GL 13 × 1.0 - 2.0
14.0	1.0 - 2.0	6.2	13.0	11.0	5.0	GL 14 × 1.0 - 2.0
15.0	0.8 - 2.0	7.2	14.3	11.5	4.4	GL 15 × 0.8 - 2.0
15.7	0.8 - 2.0	9.7	14.5	11.5	4.3	GL 16 × 0.8 - 2.0
18.0	0.8 - 2.0	12.5	17.1	11.5	4.4	GL 18 × 0.8 - 2.0
20.0	1.0 - 2.0	13.0	19.0	11.5	5.0	GL 20 × 1.0 - 2.0
22.0	1.0 - 2.0	15.0	21.2	11.5	4.8	GL 22 × 1.0 - 2.0
22.0	2.5 - 3.0	12.0	19.3	11.5	5.0	GL 22 × 2.5 - 3.0
23.0	1.0 - 2.0	17.0	21.5	11.5	5.0	GL 23 × 1.0 - 2.0
25.0	1.0 - 2.0	17.6	24.0	11.5	5.0	GL 25 × 1.0 - 2.0
25.0	2.5 - 3.5	17.0	21.9	11.5	5.0	GL 25 × 2.5 - 3.5
26.0	1.0 - 2.0	18.0	24.5	11.5	5.0	GL 26 × 1.0 - 2.0
27.0	1.0 - 2.0	20.0	26.9	11.5	4.8	GL 27 × 1.0 - 2.0
28.0	1.0 - 2.0	20.0	27.0	11.2	5.0	GL 28 × 1.0 - 2.0
30.0	1.0 - 2.0	23.0	28.7	11.5	4.8	GL 30 × 1.0 - 2.0
32.0	1.0 - 2.0	25.0	30.9	11.5	4.8	GL 32 × 1.0 - 2.0
34.0	1.0 - 3.0	26.8	32.5	11.5	4.8	GL 34 × 1.0 - 3.0
34.0	3.0 - 3.5	26.0	28.4	11.5	5.0	GL 34 × 3.0 - 3.5
34.0	3.5 - 4.0	22.0	28.7	11.8	4.8	GL 34 × 3.5 - 4.0
35.0	1.0 - 2.5	28.0	33.8	11.5	5.0	GL 35 × 1.0 - 2.5
36.0	1.0 - 2.0	28.1	34.9	11.5	4.8	GL 36 × 1.0 - 2.0
38.0	1.0 - 2.0	31.0	36.0	11.8	4.8	GL 38 × 1.0 - 2.0
40.0	1.0 - 2.0	32.9	39.3	11.8	4.8	GL 40 × 1.0 - 2.0
40.0	1.0 - 3.0	31.4	38.6	11.5	5.0	GL 40 × 1.0 - 3.0

Should your requirements not be shown please ask for separate quotation. PROTEC products and specifications are subject to improvement and change without notice.

41.2

39.3

11.5

11.5

4.9

5.0

35.5

33.0

1.0 - 2.0

2.5 - 3.5

42.0

42.0

GL 42 × 1.0 - 2.0

GL 42 × 2.5 - 3.5

## **Round Inserts - Ribbed**

Ideal tubing closures as furniture glides Protects floor surfaces when used as feet Ribbed for easy assembly and secure fitting

#### TRIPLE ADVANTAGE of PROTEC CAPTOP

**QUALITY.** Ideal tubing closures as furniture glides. Protects floor surfaces when used as feet. Ribbed for easy assembly and secure fitting.

**AVAILABILITY.** With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

PHILOSOPHY. Innovative protective closures at the best price in the market.





Outside Dimension of Tube	Wall Thickness	Α	В	н	т	Reference-No.
D	w					
45.0	1.0 - 2.0	37.3	43.2	11.5	5.0	GL 45 × 1.0 - 2.0
46.0	1.0 - 2.0	36.0	43.7	11.5	5.0	GL 46 × 1.0 - 2.0
48.0	1.0 - 2.5	40.0	46.0	14.5	5.0	GL 48 × 1.0 - 2.5
48.0	3.0 - 4.0	39.0	44.2	14.1	5.0	GL 48 × 3.0 - 4.0
50.0	1.0 - 2.0	43.0	49.3	11.5	4.7	GL 50 × 1.0 - 2.0
55.0	1.0 - 2.0	47.0	53.7	13.5	5.0	GL 55 × 1.0 - 2.0
60.0	1.5 - 3.0	48.0	57.8	17.0	4.0	GL 60 × 1.5 - 3.0
60.0	3.0 - 4.0	51.0	55.6	21.4	5.2	GL 60 × 3.0 - 4.0
70.0	2.0 - 4.5	59.0	67.0	21.0	5.0	GL 70 × 2.0 - 4.5
76.0	1.5 - 2.5	69.0	73.8	21.5	5.0	GL 76 × 1.5 - 2.5
76.0	3.0 - 4.0	66.0	71.6	21.5	5.0	GL 76 × 3.0 - 4.0
90.0	2.5 - 5.0	79.0	86.5	20.0	5.0	GL 90 × 2.5 - 5.0
102.0	2.0 - 4.0	92.0	98.7	20.0	5.0	GL 102 × 2.0 - 4.0
120.0	2.0 - 4.0	106.0	116.5	28.0	5.5	GL 120 × 2.0 - 4.0

All dimensions in mm

Material : LD-PE, low density polyethylene

Standard Colour : black

#### Individual Productions :

On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.





CAPTOP

**EP 620** 

Should your requirements not be shown please ask for separate quotation.

PROTEC products and specifications are subject to improvement and change without notice.